



Geostationary Lightning Mapper: Gridded Products (FED)

Quick Guide




Gridded GLM Products

- GLM Level 2 data (events, groups, and flashes) are produced as points, resulting in a loss of information concerning the spatial extent
- Gridded GLM products restore and disseminate the spatial footprint information while greatly reducing the file size
- Gridded GLM products involve re-navigating the GLM event latitude / longitude to the 2x2 km Advanced Baseline Imager (ABI) fixed grid
- Flash extent density (FED), the number of flashes that occur within a grid cell over a given period of time, is the first NWS product


Gridding Procedures

- A corner point lookup table is used to re-create event polygons from the L2 points
- Parent-child relationships are used to combine the event polygons into group and flash polygons
- These polygons are then subdivided at the flash, group, and event levels by slicing them with the ABI fixed grid
- The next step accumulates and weights the sliced polygons at the flash, group, and event levels to create the gridded products
- FED values are rounded to the nearest integer


(1) Re-create event, group, and flash polygons from L2 points

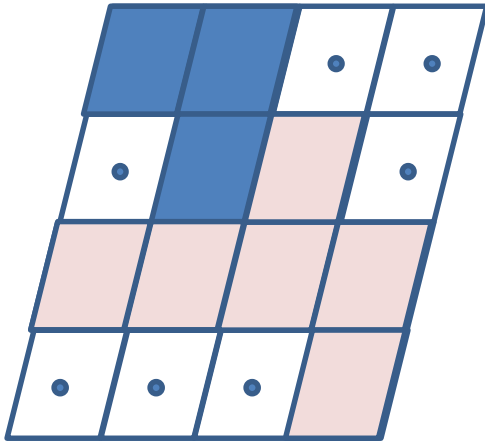

(2) Slice GLM polygons with the ABI fixed grid

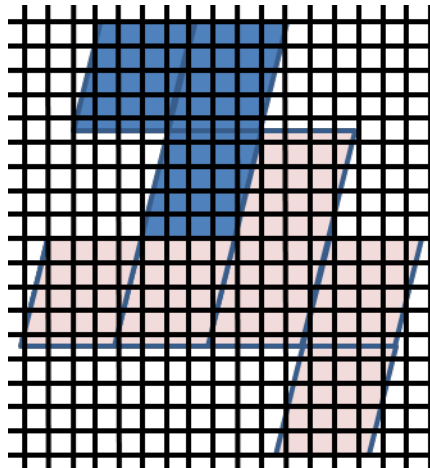

(3) Accumulate/weight sliced polygons to create FED product

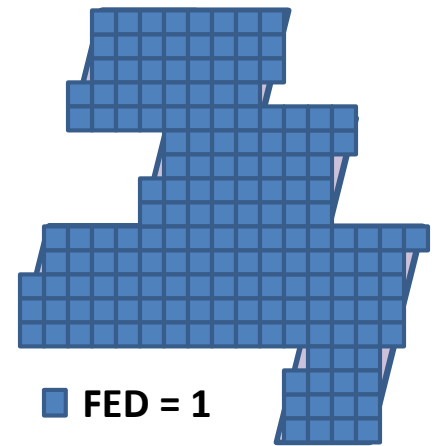

Motivation for Gridded Products

- Many years of research and operational LMA demonstrations have shown the FED to be the preferred total lightning product
- FED best portrays, in a single product, the quantity/extent of GLM flashes/events
- The initial plan is for 1-min and 5-min window FED grids to reach AWIPS within ~1 minute
- More gridded products will be incorporated later

Primary GLM Applications


- Detect electrically active storms
- Observe the areal lightning extent
- Track embedded convective cells
- Identify strengthening and weakening storms
- Monitor convective mode and storm evolution,
- Characterize storms as they transition offshore,
- Provide insights into TC intensity changes






Geostationary Lightning Mapper: Gridded Products (FED) Quick Guide




GLM FED with visible imagery from an ABI mesoscale sector

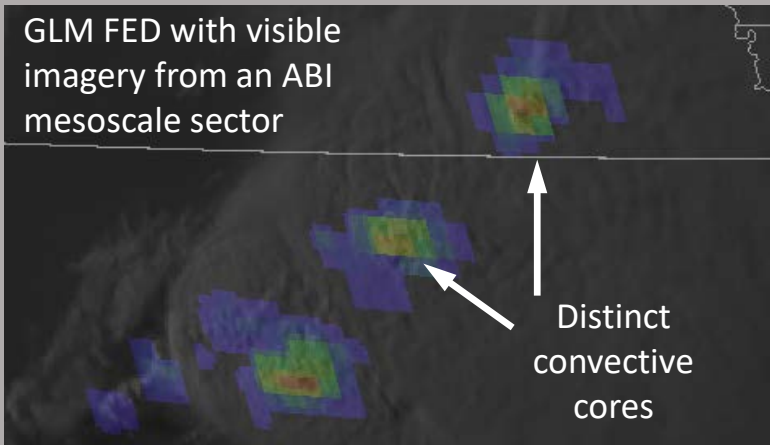

Collocation of greatest flash rates and tallest storms

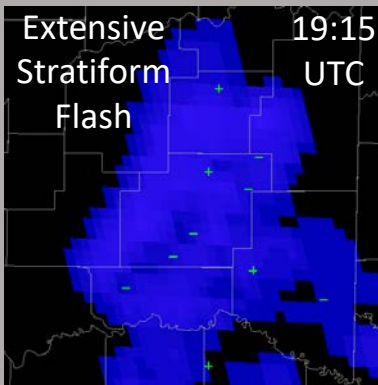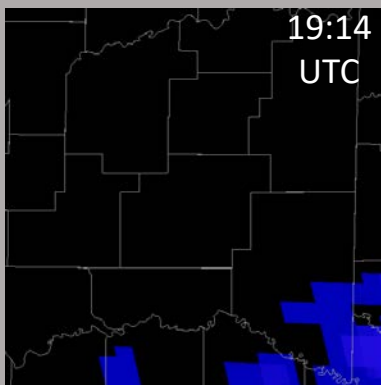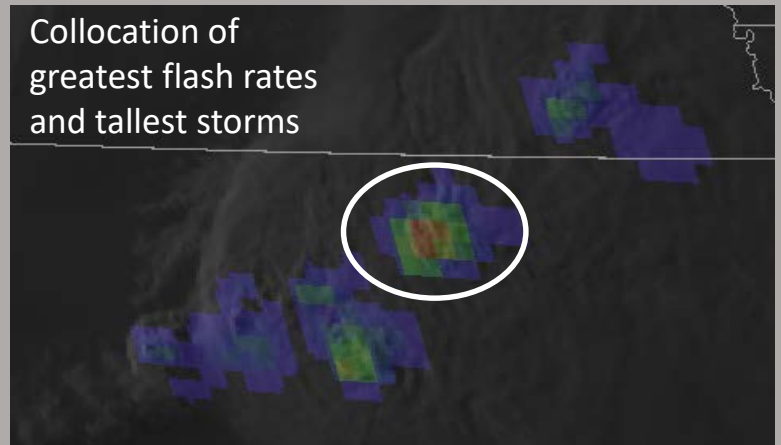


Flash Extent Density

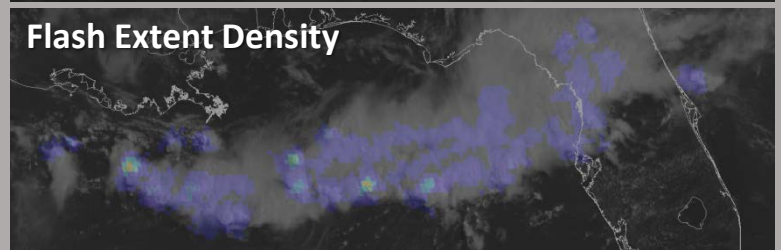


GLM gridding technique produces other gridded products under evaluation for potential AWIPS integration


Average flash area

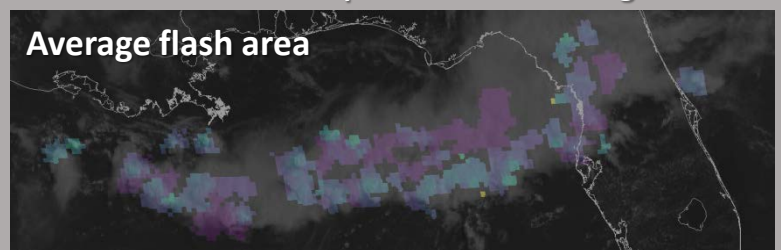


GLM FED with ABI IR

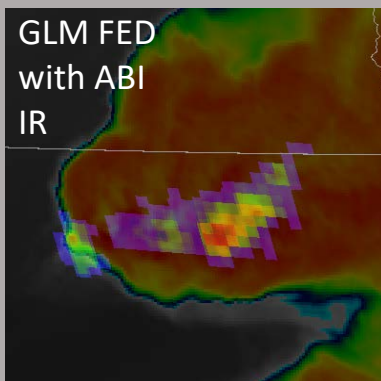

Low-cloud illumination

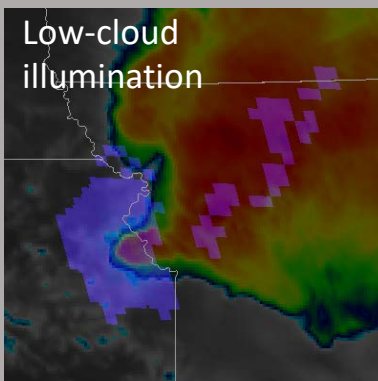

Total optical energy

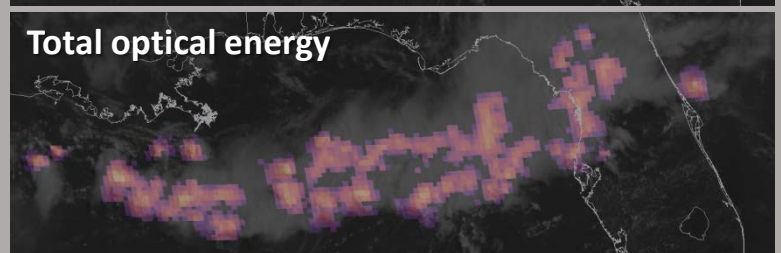

Nocturnal effects:

- The increased sensitivity induced by the nighttime background makes nocturnal flashes appear larger than identical flashes during the day
- Some of this signal also relates to the tendency for nocturnal storms to produce larger flashes as they grow upscale into mesoscale convective systems or weaken into messier convective scenes
- Another nocturnal feature is low cloud illumination by nearby deep convection
- Rebound events appear as spikes stretching southward from strong flashes, most common at night and indicative of flashes with continuing current

Additional Resources

- GLM VLab Community:
<https://go.usa.gov/xU5MF>
- GLM Faculty Virtual Course
- NESDIS/STAR - CICS-MD
- NASA SPoRT Home Page

Hyperlinks not available when viewing material in AIR Tool